

Anchorwall® *industrial partitioning*

Protectors of
momentum

Anchorwall® is a steel, part-height, fixed, internal partition wall. Anchorwall is used to divide large open areas, create enclosed storage areas, workspaces, restricted access zones, and to segregate machinery or processes. Use a combination of panel types and access options to create your customised solution. Panels stack vertically to create the height you need and take up minimal floor space to maximise areas. We install in tight spaces, quickly and cleanly so your operations can continue.



Range of
panel types



Range of
access
options



Reduce
noise



Minimal
floor space
required



Quick and clean
installation



Reconfigure
and relocate

Features and benefits

Modular walling system	<ul style="list-style-type: none"> • Use multi-tier to create part-height partition walls • Use multiple panel types to create a tailored solution (e.g. glazed panels, sliding gates) • Self-supporting – secured to the floor for stability, with no top fix connection to the ceiling • Easy to install in tight spaces compared to traditional partitioning methods • Easily adapt, reconfigure or relocate when needs change • Use part-height to create a solid steel base, with Flexiwall® above to deliver a floor-to-ceiling partition wall solution
Takes up minimal floor space	<ul style="list-style-type: none"> • Ideal for tight spaces (e.g. install solid walls close to warehouse racking and factory equipment)
Range of panel types and colours	<ul style="list-style-type: none"> • Range of panel types to suit project requirements – single skin, double skin, mesh or perforated • Choose non-standard colours to reflect your brand and improve the environment for employees and visitors • Use mesh panels to allow for natural light transit • Sound reduction, insulated and fire rated panels are available on request
Range of doors and accessories	<ul style="list-style-type: none"> • Incorporate Anchorwall® steel pedestrian doors (swing or sliding), Fastflex® fast action doors, Flexistrip® PVC strip doors, Flexidoor® crash doors and Easiguard® crash barriers
Quick and clean installation method	<ul style="list-style-type: none"> • Minimal impact on production and operation schedules




Technical specifications

Material performance	
Panel composites	Full steel; steel/glass/steel; steel/glass; fully glazed; steel/mesh/steel
Paint finishes	Electrostatically powder coated in the following standard colours; grey/sandstone/white/stone (Other colours are available on request)
Typical panel heights	Between 2400 - 3000mm
Panel widths	Up to 1000m
Panel thickness	Between 43 - 47mm (Mesh constructed from weld mesh 50x50x3mm (10g) spot welded to frame)
Fire rating	Fire rated panels are available on request
Sound reduction	Between 28 - 32dB
Thermal insulation	Thermally insulated panels available on request



Anchorwall can be used as a fixed solid partition wall to; subdivide storage areas, create site offices and clean rooms, separate different operational processes or machines/equipment, product segregation for security (e.g chemicals and liquids etc). Can also be used part-height to create a solid base, with Flexiwall® above to deliver a floor-to-ceiling partition wall.

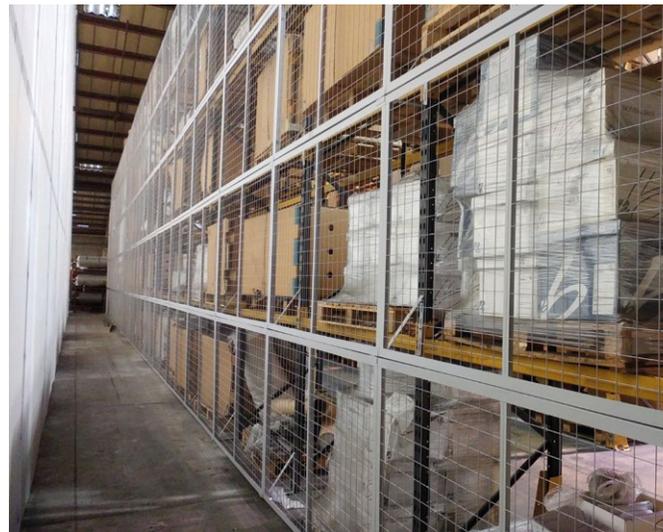

This fact sheet is for illustrative purposes only and based on the latest information at the time of print. Installation methods may vary depending on specific project requirements. Westgate Global reserve the right to make changes at any time without notice. WG-PFS-AW-0126 © Westgate Global Ltd.